Canon

Corporate Solutions

imageRUNNER® 3035

meap
POWERED BY

Additional Finisher Tray-B1

Main Unit

Inner 2-Way Tray-D1

Finisher-S1

Copy Tray-J1

Puncher Unit-M1

Cabinet-P1

Cassette Feeding Unit-Y3

Paper Deck-Q1

Saddle Finisher-AE2
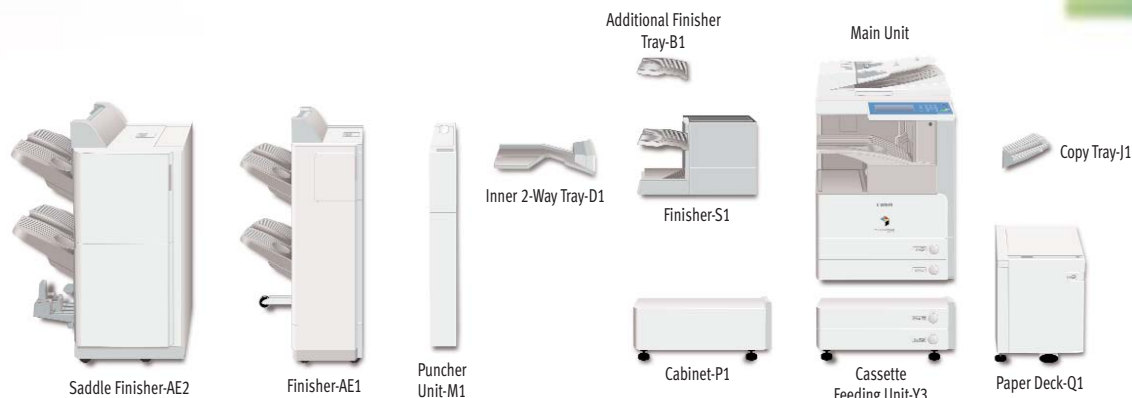
Finisher-AE1

Max. Stapling Capacity:	50 Sheets (Letter) 30 Sheets (11" x 17", Legal, Letter-R)
Dimensions (H x W x D):	12-3/8" x 23-1/2" x 21-3/4" (315mm x 598mm x 552mm)
Installation Space (W x D):	41-1/8" x 27-5/8" (1044mm x 700mm)
Power Consumption:	Approx. 45W (When Additional Finisher Tray-B1 is attached)
Attachable Accessories:	Additional Finisher Tray-B1 Puncher Unit-R1 Copy Tray-J1

Additional Finisher Tray-B1 (Option for Finisher-S1)

Tray Capacity:	See Finisher-S1 specifications
Dimensions (H x W x D):	3-1/8" x 7-7/8" x 15-5/8" (80mm x 200mm x 395mm)
Weight:	Approx. 3.7 lb. (1.7kg)

Puncher Unit-R1 (Option for Finisher-S1)

Acceptable Paper Sizes:	11" x 17", Legal, Letter, Letter-R
Acceptable Paper Weight:	17 lb. to 32 lb. Bond
Punch Type	
Two Holes:	Legal, Letter-R
Three Holes:	11" x 17", Letter
Punch Waste Capacity	
Two Holes:	Approx. 2,500 Sheets
Three Holes:	Approx. 1,500 Sheets
Dimensions (H x W x D):	6-7/8" x 19-7/8" x 5-1/8" (175mm x 505mm x 130mm)
Weight:	Approx. 8.6 lb. (3.9kg)

Finisher-AE1/Saddle Finisher-AE2

Number of Trays:	2 Trays
Acceptable Paper Sizes:	11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Envelope, Freesize (3-7/8" x 5-7/8" to 11-3/4" x 17")
Acceptable Paper Weight:	17 lb. to 32 lb. Bond
Paper Capacity Per Tray	
Non-collate, Collate, Group Mode:	1,000 Sheets (Letter, Statement-R, Executive) 500 Sheets (11" x 17", Legal, Letter-R)
Staple Mode:	1,000 Sheets/30 Sets (Letter, Executive) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Staple Positions:	Corner Staple, Double-Staple
Max. Stapling Capacity:	50 Sheets (Letter, Executive) 30 Sheets (11" x 17", Legal, Letter-R)
Saddle-Stitching*	
Acceptable Paper Sizes:	11" x 17", Legal, Letter-R
Saddle-Stitch Capacity:	15 Sheets (60 Page Booklets)
Tray Capacity:	25 Sets (1 to 5 Sheets) 15 Sets (6 to 10 Sheets) 10 Sets (11 to 15 Sheets)
Folding:	V-Folding

Dimensions (H x W x D)	
Finisher-AE1:	40-7/8" x 25-3/8" x 25-7/8" (1037mm x 643mm x 657mm)
Saddle Finisher-AE2:	40-7/8" x 29-3/8" x 25-7/8" (1037mm x 747mm x 657mm)
Installation Space (W x D) :	
Finisher-AE1:	59-3/8" x 27-5/8" (1058mm x 700mm) (When Stack Bypass and Auxiliary Tray are Extended)
Saddle Finisher-AE2:	63-1/4" x 27-5/8" (1607mm x 700mm) (When Stack Bypass and Auxiliary Tray are Extended)
Weight:	
Finisher-AE1:	Approx. 95.2 lb. (43.2kg)
Saddle Finisher-AE2:	Approx. 161 lb. (73.2kg)
Attachable Accessories:	Puncher Unit-M1

Puncher Unit-M1 (Option for Finisher-AE1/Saddle Finisher-AE2)

Acceptable Paper Sizes:	11" x 17", Legal, Letter, Letter-R
Acceptable Paper Weight:	17 lb. to 32 lb. Bond
Punch Type	
Two Holes:	Legal, Letter-R
Three Holes:	11" x 17", Letter
Punch Waste Capacity:	Approx. 3,000 Sheets
Dimensions (H x W x D):	37-1/8" x 4-1/4" x 24-1/4" (941mm x 107mm x 615mm)
Weight:	Approx. 15.9 lb. (7.2kg)

UFR II/PCL Printer Kit-S1

CPU:	Canon Custom Processor
Memory:	512MB (Standard) 768MB (Maximum) (Shared)
Hard Disk Drive:	20GB (Shared)
Interface Connections:	10/100Base-TX (RJ-45), USB 2.0 High Speed
Supported PDL:	UFR II, PCL 5e, PCL 6
Maximum Print Resolution:	2,400 x 600 dpi (Interpolated)
Printer Drivers	
UFR II:	Windows® 2000/XP; Windows Server 2000, Citrix MetaFrame, Macintosh® OS X (OS 10.1.5 or Later)
PCL 5e/6:	Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame
Internal Fonts:	80 Scalable Fonts, 30 Barcode, 10 Bitmap, 2 OCR Fonts
Interface Connections:	10/100 Base-TX (RJ-45), USB 2.0 High Speed
Network Operating Systems:	Novell® NetWare® v.3.2, 4.1, 4.11, 4.2, 5, 5.1, 6.5 (IPX/SPX) Windows 98, Me, 2000, XP, Server 2003 (TCP/IP) Apple® Macintosh OS 8.0 or Higher (DDP) Solaris™ 1.5x, 2.5x or Later (TCP/IP)
Accessory:	PS Printer Kit-S1

PS Printer Kit-S1 (Option for UFR II/PCL Printer Kit-S1)

Memory:	512MB (Standard) 768MB (Maximum) (Shared)
Hard Disk Drive:	20GB (Standard) (Shared)
Interface Connections:	10/100Base-TX (RJ-45), USB 2.0 High Speed
Supported PDL:	PostScript 3 Emulation
Maximum Print Resolution:	2400 x 600 dpi (Interpolated)
Printer Drivers:	Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame Macintosh OS X (OS 10.2 or Later)
Internal Fonts:	136 Scalable Fonts
Network Operating Systems:	Windows 98, Me, 2000, XP, Server 2003 Apple Macintosh OS X (10.2.8 or Later)

Universal Send Kit-G1

Address Book Capacity:	Max. 1,800 Destinations Max. 5 LDAP Servers
Sending Methods:	E-mail, I-Fax, File Server (FTP, SMB, IPX, WebDAV, User Inbox, Super G3 (Optional)
Communication Protocol File:	FTP (TCP/IP), SMB (TCP/IP), NCP (IPX), WebDAV
E-Mail/I-Fax:	SMTP, POP3, I-Fax (Simple, Full)
Data Format	
File/E-Mail:	TIFF, PDF, PDF (OCR),** Encrypted PDF,*** Digital Device Signature PDF,*** Digital User Signature PDF▲
I-Fax:	TIFF (MH, MR, MMR)

Super G3 Fax Board-Q1/Super G3 Multi-Line Fax Board-D1

Applicable Line:	Public Switched Telephone Network (PSTN)
Connection Lines:	One-Line (Super G3 Fax Board-Q1) Two-Lines (Super G3 Multi-Line Fax Board-D1)
Sending/Original Size:	Statement to 11" x 17"
Receiving/Printing Size:	Statement to 11" x 17"
Transmission Times	
ECM-MMR:	Approx. 3.2 Seconds/Page
G3MR/G3MH:	Approx. 13 Seconds/Page
JBIG:	Approx. 2.6 Seconds/Page
Auto Dial Function:	Address Book 1,800 Destinations (Including Destinations Stored in One-Touch Buttons)

imageRUNNER® 3035

OTHER OPTIONAL ACCESSORIES

- Cabinet-P1
- FL Cassette-Y1 (Replacement)
- FL Cassette-Z1 (Replacement)
- Envelope Feeder Attachment-C2
- Copy Tray-J1
- Document Tray-J1
- Card Reader-C1
- Card Reader Kit-B1
- Braille Label Kit-A1
- ADF Access Handle-A1
- Workflow Composer-A1
- Encrypted Secure Print Software-C1▲▲
- Barcode Printing Kit-A1▲▲
- Web Access Software-F1†
- Digital User Signature PDF Kit-A1†††

- Universal Send PDF Security Feature Set-A1†††
- Universal Send Searchable PDF Kit-A1†††
- imageRUNNER 256MB Expansion RAM-B1
- Secure Watermark-A1
- HDD Data Encryption Kit-B4
- HDD Data Erase Kit-A1
- Expansion Bus-B1
- USB Application Interface Board-G1
- Remote Operator's Software Kit-A2
- Voice Operation Kit-A1††
- eCopy Suite
- imageWARE™ Suite

* Available with Saddle Finisher-AE2 only.
** Requires Universal Send Searchable PDF Kit-A1.
*** Requires Universal Send PDF Security Feature Set-A1.
▲ Requires Digital User Signature PDF Kit-A1.
▲▲ Requires the UFR II/PCL Printer Kit-S1.
† Requires the imageRUNNER 256MB Expansion RAM to display Web Flash content. Requires the UFR II/PCL Printer Kit-S1 for printing functions. Add the PS Printer Kit-S1 if printing PDF files.
†† Requires imageRUNNER 256MB Expansion RAM-B1.
††† Requires Universal Send Kit-G1

Canon
imageANYWARE

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042